

15.6" Modularized Brick POS PC

- ◇ Robust & Stylish 15.6" Die casting POS integrated with a wide variety of peripherals.
- ◇ Foldable structure design in a compact size to save Total Logistics Cost (TLC).
- ◇ Motherboard designed as proprietary form factor to support diverse Intel CPU platforms.
- ◇ Tilt angle 0-90 degree.
- ◇ Modularized Design.
Combinations of USB Type-C Monitor, Stand, Box PC to be All-in-one POS PC.
- ◇ Standard VESA holes for various mounting ways.


Features



Specification

Touch	PCT	PCT (Projected Capacitive Touch) Support 10 points Multi Touch
Screen	15.6"	15.6" 1366 x 768 (220nits) , Optional 1920 x1080 (250nits / 400nits)
Motherboard		MA1N
CPU	FCBGA	Alder Lake-N N97, N300 or N305
Memory	SO-DIMM	1 x DDR4, up to 16GB
Storage	M.2 SSD	1x m.2 NVMe SSD (PCIe)
Interface	USB	6 x USB3.0, 2 x USB-C
	Cash Drawer	1 x Cash Drawer supported 12V or DC-IN Voltage 19V/24V select by Jumper
	LAN	1x Intel i-226V 2.5Giga LAN
	Display	2 x USB-C (One for main display and another for extended display) 1 x HDMI
	COM	2 x RS232 (RJ-50) RI / 5 / 12V select by BIOS
	Audio Connector	1 x 3.5 mm headphone and microphone combo jack
	Power	5.5 x 2.5 mm DC-IN Voltage 12-24V
Other	LED indicator	1 x Power
	Power Switch	1x Power On/Off switch
	AC Adaptor	65W (19V/3.42A)
	VESA	75mm x 75mm
	Operating temperature	0~40°C (32~104°F)
	Storage temperature	-20~60°C (-4~140°F)
	Dimension	379 (W) x 190.7 (D) x 317.4 (H) mm / 14.9 (W) x 7.5 (D) x 12.5 (H) inch
	Weight	G.W. 6 Kg / 13.2 lbs N.W. 5 Kg / 11 lbs
	Accessory	Optional RJ50 to DB9 convert cable (COM Port) Optional MSR, VFD customer display, 10.1" 2nd display... USB Peripherals
	Regulation	CE , LVD , FCC , VCCI

I/O Interface

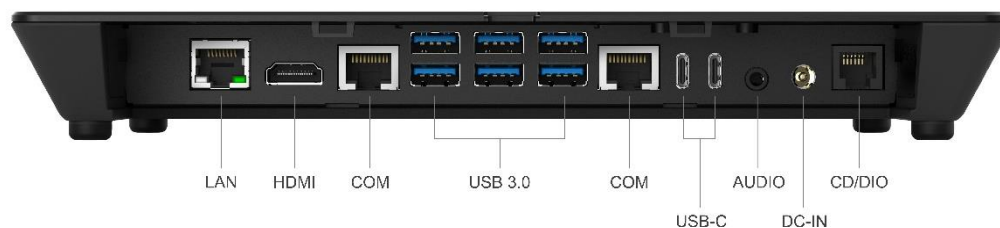

Dimensions (mm)



All information contain in this document is subject to change without prior notice.