

15.6" CONVERTIBLE POS

- ◇ Robust & Stylish 15.6" All-in-one POS Terminal integrated with a wide variety of peripherals.
- ◇ Foldable structure design in a compact size to save Total Logistics Cost (TLC).
- ◇ Motherboard designed as proprietary form factor to support diverse intel CPU platforms.
- ◇ Display tilt angle 0-180 degree.
- ◇ Standard VESA holes to support various mounting ways.
- ◇ Custom made colorful base/hinge/side covers.


Features




Specifications

Touch	PCT	PCT (Projected Capacitive Touch) Support 10 points Multi Touch
Screen	15.6"	15.6" 1366 x 768 (220nits) , Optional 1920 x1080 (250nits / 300nits)
Motherboard		MA1N
CPU	FCBGA	Alder Lake-N N97, N300 or N305
Memory	SO-DIMM	1 x DDR4, Up to 16GB
Storage	mSATA SSD	1 x m.2 2280 M-key slot
	2.5" HDD or 2.5" SSD	N/A
Communication	Wi-Fi / Bluetooth	Optional 802.11 ac/a/b/g/n Wireless module (m.2 2230)
Interface	LAN	1 x 2.5Giga LAN
	Display	1 x HDMI
	COM	2 x RS232 (RJ-50) RI / 5 / 12V select by BIOS
	USB	6 x USB3.0, 2 x USB-C Option Internal x USB 2.0 on 10pin header
	Audio Connector	1 x 3.5 mm headphone and microphone combo jack
	Power	5.5 x 2.5 mm DC-IN Voltage 12-24V
	Cash Drawer	1 x Cash Drawer supported 12V or DC-IN Voltage 19V/24V select by Jumper
Other	LED indicator	1 x Power
	Power Switch	1 x Power On/Off switch
	AC Adaptor	65W (19V/3.42A)
	VESA	75mm x 75mm
	Operating temperature	0~40℃ (32~104°F)
	Storage temperature	-20~60℃ (-4~140°F)
	Dimension	400.9 (W) x 232.3 (D) x 250.2 (H) mm / 15.8 (W) x 9.1 (D) x 9.9 (H) inch
	Weight	G.W. 5 Kg / 11 lbs N.W. 4 Kg / 8.8 lbs
	Accessory	Optional RJ50 to DB9 convert cable (COM Port) Optional MSR, VFD customer display, 10.1" 2nd display...USB Peripherals
	Regulation	CE , LVD , FCC , VCCI

I/O Interface (MA1N)

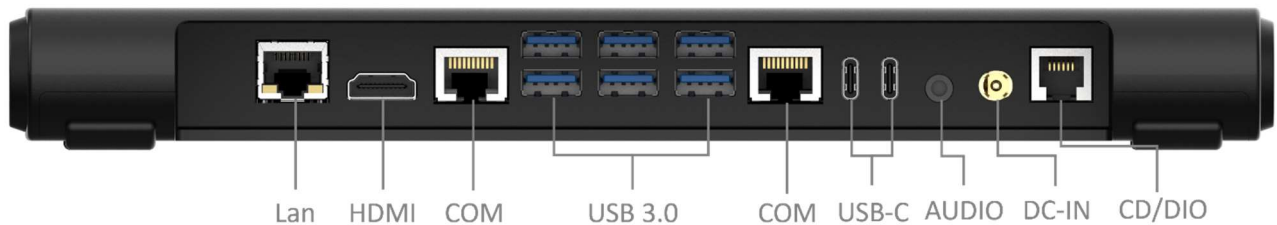

Dimensions (mm)

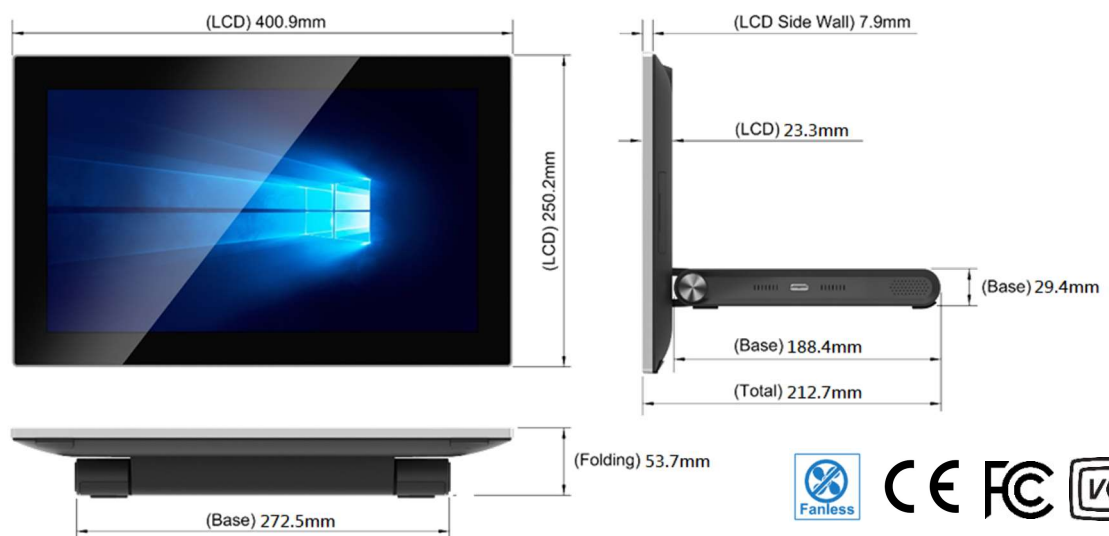

All information contain in this document is subject to change without prior notice.